


SF-XL (C) 150/250 V Unarmoured Overall Screened Pairs & Triads (LSZH), XLPE/SHF1

SF-XL (C) 150/250 V unarmoured overall screened pair & triad cables are suitable for use in offshore oil and gas, shipboard and marine applications. Our cables are made to IEC specifications and can be modified to fit your specific requirements.

Standards:

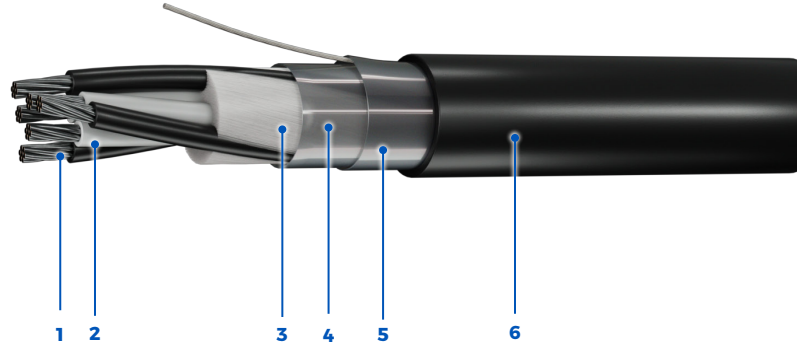

- 1 - Stranded Bare or Tinned Class 2 or Class 5 Copper Conductors
- 2 - XLPE Insulated Conductors
- 3 - Polypropylene Fillers
- 4 - Fiberglass Tape
- 5 - Overall Aluminum/Mylar Shield with Tinned Copper Drain Wire
- 6 - Protective LSZH Outer Sheath

Operating Temperature

-40°C to +90°C

Product Construction

Conductor:

- Stranded bare or tinned copper class 5 (standard) or class 2 (optional)

Insulation:

- XLPE Rated: +90°C Wet/Dry, IEC 60092-360

Shielding:

- Aluminum/mylar foil shield with tinned copper drain wire (standard)
- Copper Tape Shield (optional)

Jacket:

- FR LSZH Thermoplastic, IEC 60092-360 (SHF1)

Available in:

- Custom insulation/jacket colours

Certification/Compliances

Construction & Materials:

- IEC 60092-376
- IEC 60092-350
- IEC 60092-360 (Insulation & Sheath)
- IEC 60228 (Conductor)

Performance:

- IEC 60332-3-22, Cat. A (Flame Retardancy)
- IEC 60754-1 & 2, IEC 60684-2 (Halogen Free)
- IEC 61034-1 & 2 (Low Smoke Emission)
- Cold Bend & Impact (-40°C/-35°C)

Approvals:

- American Bureau of Shipping (ABS)
- Lloyd's Register
- Transport Canada

150/250 V

Voltage

Control and Instrumentation

Colour Coding

Custom colour coding available, inc.

- Per IEEE 1580 / IEC 60092-376, Annex A:
 - Pairs - Black, White, # coded
 - Triads - Black, White, Red, # coded

SF-XL (C) 150/250 V Unarmoured Overall Screened Pairs & Triads (LSZH), XLPE/SHF1

NUMBER OF CONDUCTORS	x	SIZE OF CONDUCTORS	NOMINAL OD OVERALL CABLE	CABLE WEIGHT	AMPACITY	SHAWFLEX PART NUMBER
(c)		(mm ²)	(in/mm)	(lbs/1000ft) / (kg/km)	(45°C ambient)	
1pr	x	0.5	0.3 / 6.4	41.02 / 61.04	14	SF021E1A01F0800
2pr	x	0.5	0.4 / 9.3	72.76 / 108.27	9	SF021E1A02F0800
4pr	x	0.5	0.4 / 10.6	97.74 / 145.46	6.3	SF021E1A04F0800
5pr	x	0.5	0.5 / 11.7	114.98 / 171.11	6.3	SF021E1A05F0800
7pr	x	0.5	0.5 / 12.6	137.6 / 204.77	6.3	SF021E1A07F0800
10pr	x	0.5	0.6 / 16	197.24 / 293.52	6.3	SF021E1A10F0800
12pr	x	0.5	0.6 / 16.4	217.13 / 323.13	6.3	SF021E1A12F0800
14pr	x	0.5	0.7 / 17.2	241.89 / 359.97	5.4	SF021E1A14F0800
19pr	x	0.5	0.8 / 19.3	305.9 / 455.23	5.4	SF021E1A19F0800
24pr	x	0.5	0.9 / 22.7	395.41 / 588.43	4.5	SF021E1A24F0800
1pr	x	0.75	0.3 / 7.2	50.84 / 75.66	15	SF021E1B01F0800
2pr	x	0.75	0.4 / 10.7	92.83 / 138.14	11	SF021E1B02F0800
4pr	x	0.75	0.5 / 12.5	133.87 / 199.22	7.7	SF021E1B04F0800
5pr	x	0.75	0.5 / 13.6	151.33 / 225.21	7.7	SF021E1B05F0800
7pr	x	0.75	0.6 / 14.8	183.95 / 273.74	7.7	SF021E1B07F0800
10pr	x	0.75	0.8 / 19.1	276.98 / 412.18	7.7	SF021E1B10F0800
12pr	x	0.75	0.8 / 19.6	307.17 / 457.11	7.7	SF021E1B12F0800
14pr	x	0.75	0.8 / 20.6	341.06 / 507.55	6.6	SF021E1B14F0800
19pr	x	0.75	0.9 / 23.1	433.56 / 645.21	6.6	SF021E1B19F0800
24pr	x	0.75	1.1 / 27.2	561.14 / 835.06	5.5	SF021E1B24F0800
1pr	x	1.5	0.3 / 8.8	73.43 / 109.28	20	SF021E3A01F0800
2pr	x	1.5	0.5 / 13.3	136.73 / 203.48	16	SF021E3A02F0800
4pr	x	1.5	0.6 / 15.6	202.8 / 301.79	11.2	SF021E3A04F0800
5pr	x	1.5	0.7 / 17	230.08 / 342.39	11.2	SF021E3A05F0800
7pr	x	1.5	0.7 / 18.7	293.73 / 437.11	11.2	SF021E3A07F0800
10pr	x	1.5	0.9 / 23.9	425.69 / 633.49	11.2	SF021E3A10F0800
12pr	x	1.5	1 / 24.7	472.7 / 703.46	11.2	SF021E3A12F0800
14pr	x	1.5	1 / 26.2	546.14 / 812.74	9.6	SF021E3A14F0800
19pr	x	1.5	1.2 / 29.4	695.03 / 1034.32	9.6	SF021E3A19F0800
24pr	x	1.5	1.4 / 34.6	895.59 / 1332.78	8	SF021E3A24F0800
1pr	x	2.5	0.4 / 9.7	90.94 / 135.33	26	SF021E5A01F0800
2pr	x	2.5	0.6 / 14.8	175.25 / 260.81	21	SF021E5A02F0800
4pr	x	2.5	0.7 / 17.4	270.06 / 401.89	14.7	SF021E5A04F0800
5pr	x	2.5	0.8 / 19.3	320.56 / 477.05	14.7	SF021E5A05F0800
7pr	x	2.5	0.8 / 21	401.7 / 597.79	14.7	SF021E5A07F0800
10pr	x	2.5	1.1 / 27.2	597.87 / 889.72	14.7	SF021E5A10F0800
12pr	x	2.5	1.1 / 28	670.68 / 998.07	14.7	SF021E5A12F0800
14pr	x	2.5	1.2 / 29.8	774.52 / 1152.62	12.6	SF021E5A14F0800
19pr	x	2.5	1.3 / 33.4	992.41 / 1476.87	12.6	SF021E5A19F0800
24pr	x	2.5	1.6 / 39.6	1300.16 / 1934.85	10.5	SF021E5A24F0800

SF-XL (C) 150/250 V Unarmoured Overall Screened Pairs & Triads (LSZH), XLPE/SHF1

NUMBER OF CONDUCTORS	X	SIZE OF CONDUCTORS	NOMINAL OD OVERALL CABLE	CABLE WEIGHT	AMPACITY	SHAWFLEX PART NUMBER
(c)		(mm ²)	(in/mm)	(lbs/1000ft) / (kg/km)	(45°C ambient)	
1tr	x	0.5	0.3 / 6.7	46.85 / 69.72	9	SF031E1A01F0800
2tr	x	0.5	0.4 / 10.1	87.11 / 129.64	7.2	SF031E1A02F0800
4tr	x	0.5	0.5 / 11.9	127.87 / 190.3	6.3	SF031E1A04F0800
5tr	x	0.5	0.5 / 12.9	145.72 / 216.86	6.3	SF031E1A05F0800
7tr	x	0.5	0.5 / 13.9	177.44 / 264.06	6.3	SF031E1A07F0800
10tr	x	0.5	0.7 / 17.7	255.17 / 379.74	5.4	SF031E1A10F0800
12tr	x	0.5	0.7 / 18.2	283.57 / 421.99	5.4	SF031E1A12F0800
14tr	x	0.5	0.8 / 19.4	328.58 / 488.98	5.4	SF031E1A14F0800
19tr	x	0.5	0.8 / 21.5	407.71 / 606.73	4.5	SF031E1A19F0800
24tr	x	0.5	1 / 25.3	527.25 / 784.63	4.5	SF031E1A24F0800
1tr	x	0.75	0.3 / 7.6	59.33 / 88.3	11	SF031E1B01F0800
2tr	x	0.75	0.5 / 12	120.9 / 179.92	8.8	SF031E1B02F0800
4tr	x	0.75	0.5 / 13.8	169.45 / 252.17	7.7	SF031E1B04F0800
5tr	x	0.75	0.6 / 15.3	203.26 / 302.48	7.7	SF031E1B05F0800
7tr	x	0.75	0.7 / 16.6	250.9 / 373.37	7.7	SF031E1B07F0800
10tr	x	0.75	0.8 / 21.2	363.57 / 541.05	6.6	SF031E1B10F0800
12tr	x	0.75	0.9 / 21.8	405.63 / 603.65	6.6	SF031E1B12F0800
14tr	x	0.75	0.9 / 23.2	466.65 / 694.46	6.6	SF031E1B14F0800
19tr	x	0.75	1 / 26	598.84 / 891.17	5.5	SF031E1B19F0800
24tr	x	0.75	1.2 / 30.6	774.18 / 1152.11	5.5	SF031E1B24F0800
1tr	x	1.5	0.4 / 9.2	87.44 / 130.13	16	SF031E3A01F0800
2tr	x	1.5	0.6 / 14.6	171.89 / 255.79	12.8	SF031E3A02F0800
4tr	x	1.5	0.7 / 17.2	263.86 / 392.67	11.2	SF031E3A04F0800
5tr	x	1.5	0.8 / 19.1	312.83 / 465.55	11.2	SF031E3A05F0800
7tr	x	1.5	0.8 / 20.8	391.14 / 582.08	11.2	SF031E3A07F0800
10tr	x	1.5	1.1 / 26.9	582.35 / 866.63	9.6	SF031E3A10F0800
12tr	x	1.5	1.1 / 27.8	653.42 / 972.4	9.6	SF031E3A12F0800
14tr	x	1.5	1.2 / 29.5	754.07 / 1122.18	9.6	SF031E3A14F0800
19tr	x	1.5	1.3 / 33.1	965.63 / 1437.01	8	SF031E3A19F0800
24tr	x	1.5	1.5 / 39	1244.61 / 1852.18	8	SF031E3A24F0800
1tr	x	2.5	0.4 / 10.2	111.71 / 166.24	21	SF031E5A01F0800
2tr	x	2.5	0.7 / 16.6	234.86 / 349.51	16.8	SF031E5A02F0800
4tr	x	2.5	0.8 / 19.5	371.25 / 552.48	14.7	SF031E5A04F0800
5tr	x	2.5	0.8 / 21.4	429.66 / 639.4	14.7	SF031E5A05F0800
7tr	x	2.5	0.9 / 23.6	559.54 / 832.69	14.7	SF031E5A07F0800
10tr	x	2.5	1.2 / 30.6	828.29 / 1232.64	12.6	SF031E5A10F0800
12tr	x	2.5	1.2 / 31.6	936.31 / 1393.37	12.6	SF031E5A12F0800
14tr	x	2.5	1.3 / 33.5	1080.99 / 1608.69	12.6	SF031E5A14F0800
19tr	x	2.5	1.5 / 37.6	1396.69 / 2078.51	10.5	SF031E5A19F0800
24tr	x	2.5	1.8 / 44.6	1823.32 / 2713.4	10.5	SF031E5A24F0800

*Ampacity value based on ABS Rules for Building and Classing Steel Vessels, Version 2023, Table-6. Values are corrected according to Table 6 for number of Conductors.

**Available in both American Wire Gauge (AWG) and Metric wire conductor sizes