


SH-HFA (I) 150/250 V Armoured Individually and Overall Screened Pairs & Triads (LSZH), HF90/SHF1

SH-HFA (I) 150/250 V armoured individually and overall screened pair & triad cables are suitable for use in offshore oil and gas, shipboard and marine applications. Our cables are made to IEC specifications and can be modified to fit your specific requirements.

Standards:

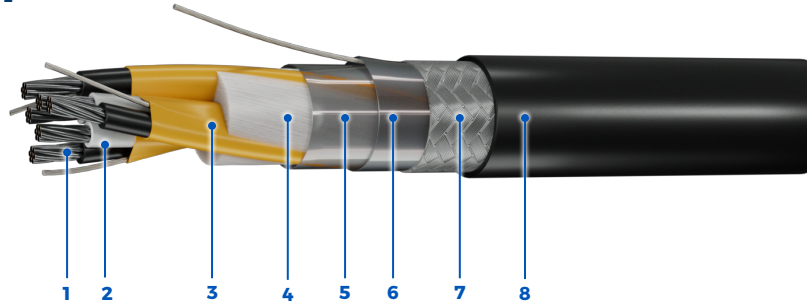

- 1 - Stranded Bare or Tinned Class 2 or Class 5 Copper Conductors
- 2 - Halogen Free HF90 Insulated Conductors
- 3 - Individual Aluminum/Mylar Shield with Tinned Copper Drain Wire
- 4 - Polypropylene Fillers
- 5 - Fiberglass Tape
- 6 - Overall Aluminum/Mylar Shield with Tinned Copper Drain Wire
- Optional: LSZH Inner Sheath (Not Shown)
- 7 - Tinned-Copper or Bronze Braided Armour
- 8 - Protective LSZH Outer Sheath

Operating Temperature

-40°C to +90°C

Product Construction

Conductor:

- Stranded bare or tinned copper class 5 (standard) or class 2 (optional)

Insulation:

- Halogen Free HF90 Rated: +90°C Wet/Dry, IEC 60092-360

Shielding:

- Aluminum/mylar foil shield with tinned copper drain wire (standard), available for both individual and overall shields
- Copper Tape Shield (optional)

Armour:

- Tinned-Copper Braid (optional)
- Bronze Braid (optional)

Jacket:

- FR LSZH Thermoplastic, IEC 60092-360 (SHF1)

Available in:

- Custom insulation/jacket colours

Certification/Compliances

Construction & Materials:

- IEC 60092-376
- IEC 60092-350
- IEC 60092-360 (Insulation & Sheath)
- IEC 60228 (Conductor)

Performance:

- IEC 60332-3-22, Cat. A (Flame Retardancy)
- IEC 60754-1 & 2, IEC 60684-2 (Halogen Free)
- IEC 61034-1 & 2 (Low Smoke Emission)
- IEC 60811-403 (Ozone Resistance)
- Cold Bend & Impact (-40°C/-35°C)

Approvals:

- American Bureau of Shipping (ABS)
- Lloyd's Register
- Transport Canada

150/250 V

Voltage

Colour Coding

Custom colour coding available, inc.

- Per IEEE 1580 / IEC 60092-376, Annex A:

- Pairs - Black, White, # coded
- Triads - Black, White, Red, # coded

Control and Instrumentation

SH-HFA (I) 150/250 V Armoured Individually and Overall Screened Pairs & Triads (LSZH), HF90/SHF1

NUMBER OF CONDUCTORS	x	SIZE OF CONDUCTORS	NOMINAL OD OVERALL CABLE	CABLE WEIGHT	AMPACITY	SHAWFLEX PART NUMBER
(c)		(mm ²)	(in/mm)	(lbs/1000ft) / (kg/km)	(45°C ambient)	
2pr	x	0.5	0.5 / 12.5	172.8 / 257.15	9	SHC22E1A02F0800
4pr	x	0.5	0.6 / 14.4	227.52 / 338.59	6.3	SHC22E1A04F0800
5pr	x	0.5	0.6 / 15.6	253.58 / 377.36	6.3	SHC22E1A05F0800
7pr	x	0.5	0.7 / 17	304.26 / 452.79	6.3	SHC22E1A07F0800
10pr	x	0.5	0.8 / 21.3	419.98 / 625.01	6.3	SHC22E1A10F0800
12pr	x	0.5	0.9 / 21.9	455.17 / 677.37	6.3	SHC22E1A12F0800
14pr	x	0.5	0.9 / 23	496.45 / 738.79	5.4	SHC22E1A14F0800
19pr	x	0.5	1 / 25.6	608.27 / 905.2	5.4	SHC22E1A19F0800
24pr	x	0.5	1.2 / 29.9	768.12 / 1143.08	4.5	SHC22E1A24F0800
2pr	x	0.75	0.5 / 13.5	202.26 / 301	11	SHC22E1B02F0800
4pr	x	0.75	0.6 / 15.3	264.22 / 393.2	7.7	SHC22E1B04F0800
5pr	x	0.75	0.7 / 16.8	302.45 / 450.09	7.7	SHC22E1B05F0800
7pr	x	0.75	0.7 / 18.1	355.81 / 529.5	7.7	SHC22E1B07F0800
10pr	x	0.75	0.9 / 22.8	495.2 / 736.94	7.7	SHC22E1B10F0800
12pr	x	0.75	0.9 / 23.7	553.16 / 823.2	7.7	SHC22E1B12F0800
14pr	x	0.75	1 / 24.9	611.18 / 909.53	6.6	SHC22E1B14F0800
19pr	x	0.75	1.1 / 27.7	750.44 / 1116.77	6.6	SHC22E1B19F0800
24pr	x	0.75	1.3 / 32.4	950.33 / 1414.24	5.5	SHC22E1B24F0800
2pr	x	1.5	0.6 / 15.8	263.42 / 392.01	16	SHC22E3A02F0800
4pr	x	1.5	0.7 / 18.4	365.02 / 543.21	11.2	SHC22E3A04F0800
5pr	x	1.5	0.8 / 20.3	422.38 / 628.58	11.2	SHC22E3A05F0800
7pr	x	1.5	0.9 / 21.9	504.42 / 750.66	11.2	SHC22E3A07F0800
10pr	x	1.5	1.1 / 28.1	724.68 / 1078.44	11.2	SHC22E3A10F0800
12pr	x	1.5	1.1 / 28.9	796.78 / 1185.74	11.2	SHC22E3A12F0800
14pr	x	1.5	1.2 / 30.6	900.77 / 1340.5	9.6	SHC22E3A14F0800
2pr	x	2.5	0.7 / 17.6	324.98 / 483.63	21	SHC22E5A02F0800
4pr	x	2.5	0.8 / 20.5	460.04 / 684.61	14.7	SHC22E5A04F0800
5pr	x	2.5	0.9 / 22.4	520.26 / 774.23	14.7	SHC22E5A05F0800
7pr	x	2.5	1 / 24.5	643.83 / 958.12	14.7	SHC22E5A07F0800
10pr	x	2.5	1.2 / 31.4	925.24 / 1376.91	14.7	SHC22E5A10F0800
12pr	x	2.5	1.3 / 32.4	1024.82 / 1525.1	14.7	SHC22E5A12F0800
2tr	x	0.5	0.5 / 13.9	208.59 / 310.41	7.2	SHC32E1A02F0800
4tr	x	0.5	0.6 / 15.8	271.86 / 404.57	6.3	SHC32E1A04F0800
5tr	x	0.5	0.7 / 17.4	312.41 / 464.91	6.3	SHC32E1A05F0800
7tr	x	0.5	0.7 / 18.8	365.87 / 544.48	6.3	SHC32E1A07F0800
10tr	x	0.5	0.9 / 24	523 / 778.32	5.4	SHC32E1A10F0800
12tr	x	0.5	1 / 24.7	569.54 / 847.56	5.4	SHC32E1A12F0800
14tr	x	0.5	1 / 25.9	627.32 / 933.55	5.4	SHC32E1A14F0800

SH-HFA (I) 150/250 V Armoured Individually and Overall Screened Pairs & Triads (LSZH), HF90/SHF1

NUMBER OF CONDUCTORS	x	SIZE OF CONDUCTORS	NOMINAL OD OVERALL CABLE	CABLE WEIGHT	AMPACITY	SHAWFLEX PART NUMBER
(c)		(mm ²)	(in/mm)	(lbs/1000ft) / (kg/km)	(45°C ambient)	
19tr	x	0.5	1.1 / 28.9	769.63 / 1145.33	4.5	SHC32E1A19F0800
2tr	x	0.75	0.6 / 14.8	236.11 / 351.37	8.8	SHC32E1B02F0800
4tr	x	0.75	0.7 / 17.1	324 / 482.16	7.7	SHC32E1B04F0800
5tr	x	0.75	0.7 / 18.5	364.03 / 541.74	7.7	SHC32E1B05F0800
7tr	x	0.75	0.8 / 20.3	445.41 / 662.84	7.7	SHC32E1B07F0800
10tr	x	0.75	1 / 25.6	622.35 / 926.16	6.6	SHC32E1B10F0800
12tr	x	0.75	1 / 26.4	682.19 / 1015.21	6.6	SHC32E1B12F0800
14tr	x	0.75	1.1 / 28	771.94 / 1148.77	6.6	SHC32E1B14F0800
19tr	x	0.75	1.2 / 31.2	957.1 / 1424.32	5.5	SHC32E1B19F0800
2tr	x	1.5	0.7 / 17.7	324.53 / 482.96	12.8	SHC32E3A02F0800
4tr	x	1.5	0.8 / 20.7	458.38 / 682.15	11.2	SHC32E3A04F0800
5tr	x	1.5	0.9 / 22.5	518.13 / 771.05	11.2	SHC32E3A05F0800
7tr	x	1.5	1 / 24.7	640.6 / 953.32	11.2	SHC32E3A07F0800
10tr	x	1.5	1.2 / 31.6	921.37 / 1371.15	9.6	SHC32E3A10F0800
12tr	x	1.5	1.3 / 32.6	1019.81 / 1517.64	9.6	SHC32E3A12F0800
2tr	x	2.5	0.8 / 19.5	395.16 / 588.06	16.8	SHC32E5A02F0800
4tr	x	2.5	0.9 / 22.8	572.43 / 851.87	14.7	SHC32E5A04F0800
5tr	x	2.5	1 / 25.2	665.49 / 990.35	14.7	SHC32E5A05F0800
7tr	x	2.5	1.1 / 27.6	831.57 / 1237.52	14.7	SHC32E5A07F0800

*Ampacity value based on ABS Rules for Building and Classing Steel Vessels, Version 2023, Table-6. Values are corrected according to Table 6 for number of Conductors.

**Available in both American Wire Gauge (AWG) and Metric wire conductor sizes